


Keller Group plc - Who we are

Every day, people around the world live and work on ground prepared by Keller, the world's largest geotechnical specialist contractor.



North America

Bencor
Case Foundation
Hayward Baker
HJ Foundation
Keller Canada
McKinney Drilling
Moretrench Industrial
Suncoast



EMEA

Central Europe
North-East Europe
North-West Europe
South-East Europe
Brazil
Franki Africa
Middle East
Iberia and Latin America
French Speaking Countries



Asia-Pacific

ASEAN India Keller Australia Waterway Constructions Austral Construction

Solutions specialist

Used individually or in combination, our technologies solve a wide range of challenges across the entire construction sector – from industrial, commercial and housing projects to infrastructure construction.

Global strength and local focus

Global strength and local focus are what makes us unique. Our knowledge of local markets and ground conditions means we're ideally placed to understand and respond to a particular local engineering challenge. Our global knowledge base then allows us to tap into a wealth of experience, and the best minds in the industry, to find the optimum solution. With 10,000 employees and operations in more than 40 countries, we have the people, expertise, experience and financial stability to respond quickly, get the job done and see it through safely.

By connecting global resources and local knowledge, we can tackle some of the largest and most demanding projects around the world but the everyday work we do is just as important and, in total, we handle an unrivalled 7,000 projects every year.









We are the world's largest geotechnical specialist contractor

Helping create infrastructure that improves the world's communities



Ground improvement



Grouting



Deep foundations



Earth retention



Instrumentation and monitoring



Overview

The unique character of each project and the underlying site conditions mean that customised solutions in the planning and construction of excavation support are essential. As a full-service provider, Keller is able to offer solutions perfectly tailored to the requirements of any project.

Keller can provide suitable solutions for many soil conditions and technical requirements in connection with excavation support. Our extensive geotechnical expertise accumulated over the years enables us to provide cost-efficient solutions, especially on complex shoring systems.

The variety of systems we are able to offer allows us to respond flexibly to a variety of boundary conditions. We are committed to maintaining the highest quality and environmental standards, which are deeply rooted in our company philosophy.

Our engineers are constantly pushing the boundaries of our high-performance products, and we make extensive use of the most advanced software to ensure our designs are the best they can be to suit your project.

Health and safety


Health and safety is a priority for Keller and we have a proven track record of one of the lowest accident frequency rates in our industry. The commitment of leaders and employees to our Think Safe programme has earned us awards and recognition from industry bodies as well as our clients.

We believe no one should be harmed as a result of any work we do and our ultimate goal is zero incidents.





When designing and constructing excavation support, we work to complex boundary conditions and performance requirements, whilst considering how to make the best use of the land available.

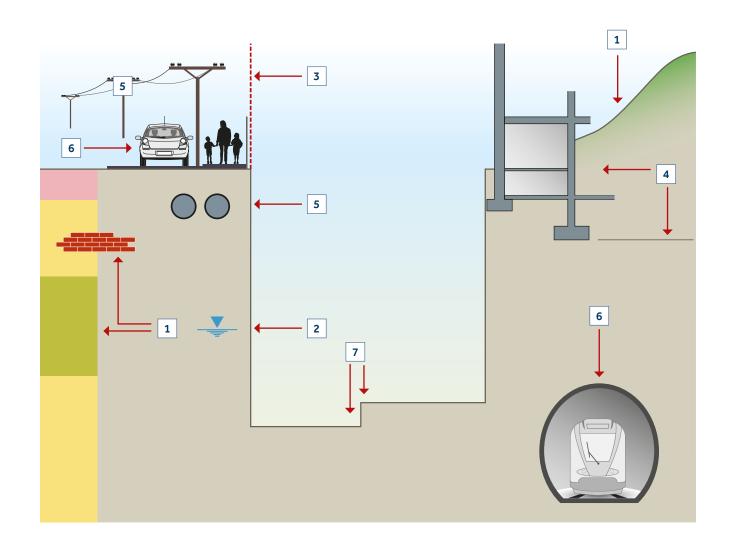

Requirements

- Minimum impact on existing building structures
- No disturbance to day-to-day operations
- Optimum use of plot space and facilities
- Integration of foundation system into the overall structure
- Minimum deflection even for deep excavation support
- Compliance with environmental standards, noise, dust- and vibration regulations
- Efficient use of natural resources
- Extensive monitoring and verification through measurement, with detailed records
- Close cooperation between owner, designer and foundation specialist

1. Soil conditions Difficult soil conditions (stratigraphy, obstructions, existing slopes etc) require careful design and planning to select an appropriate solution.

2. Groundwater Protection of groundwater against pollution and prevention of water ingress into the excavation pits.

3. Plot boundaries

Plots and existing rights of way require particular care when planning the building site and during construction.

4. Existing buildings

Damage to adjacent buildings as a result of the work being conducted must be avoided. In particular, the serviceability of the existing building foundations must not be compromised. This often requires additional support and underpinning to secure them.

5. Underground services
 Underground services
 such as sewage and water
 pipes, power lines and
 communication cables
 must remain in service,
 especially in densely
 populated areas such as
 city centres.

6. Traffic

Traffic flow should be impeded as little as possible and existing traffic infrastructure needs to be protected against damage.


7. Varying excavation depths

Some projects require excavation depths to vary across the site, for which a range of tailored solutions may be required.





Keller offers flexible solutions and specialist techniques to solve even highly complex excavation support problems. Working to industry leading quality and environmental standards is an integral part of our philosophy.

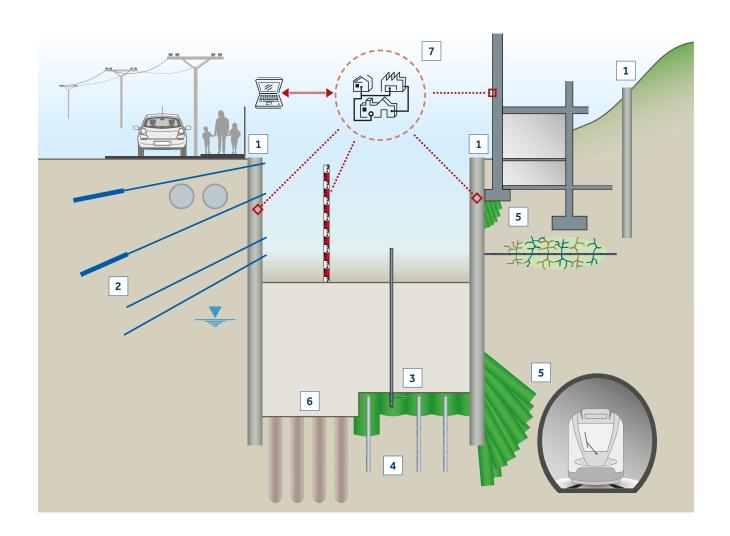

Solutions

- Complete package: A full range of methods for the construction of excavation support to suit your job
- Custom-made solutions designed in our in-house Engineering Centre
- Low-vibration and ecologically sustainable construction
- Use of environmentally compatible materials

- Continuous monitoring
- Flexible response to unexpected problems
- Direct communication between client and Keller
- Extensive knowledge from more than 150 years' experience in ground engineering

5. Base slabs Jet grouting method (Soilcrete®) · Soilfrac® curtain 6. Foundations · Bored pile walls Piles • Diaphragm wall barrettes Full range of soil improvement methods Jet grouting method (Soilcrete®) Deep soil mixing method (DSM) 7. Measurement Monitoring Control Documentation

THE PARTY NAMED IN

page 9

1. Pit walls

- · Bored pile walls
- Diaphragm walls
- Sheet pile walls
- Berlin type pit lining
- Shotcrete
- Soil mixing method (DSM)
- Jet grouting method (including Soilcrete® wall/ underpinning)
- Combined solutions (eg bored piles and Soilcrete[®])

2. Groundwater

- Anchors
- Soil nails
- Steel and concrete reinforcements

3. Base slabs

- Jet grouting method (Soilcrete®)
- Soft-gel chemical grout
- Underwater concrete

4. Uplift control


Micropiles



Glücksteinquartier Mannheim, Germany

In a major development project for the city of Mannheim, Keller Grundbau constructed the 'No. 1 Excavation Pit' in the southern part of the inner city. The site covered an area of around 6,000m² with an average depth of 5.50m. Keller constructed a pedestrian ramp (interpile sheeting with shotcrete infill) and excavation pit shoring with bored pile walls and anchors, as well as completing earth excavation and demolition work and soil improvement.



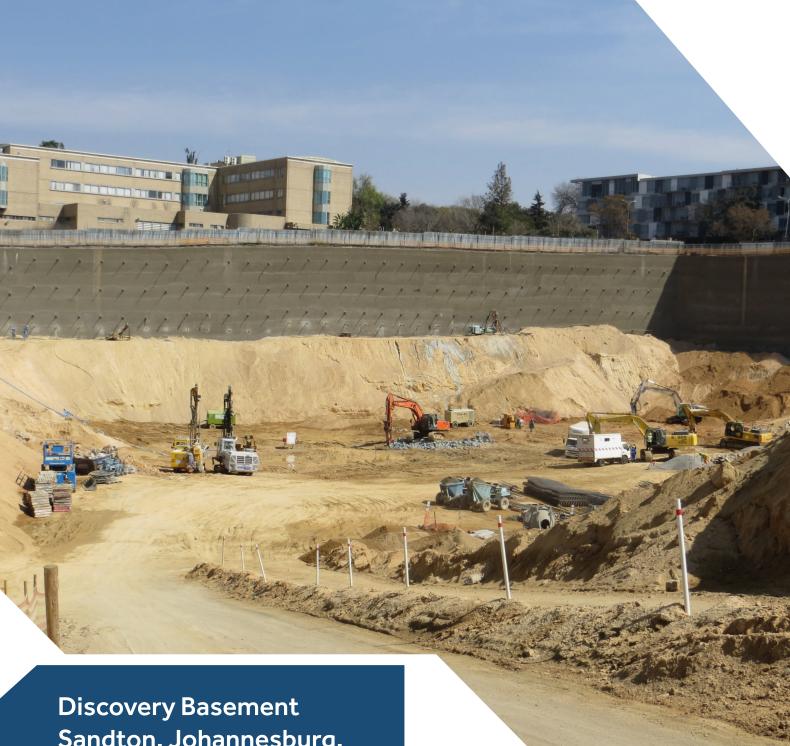

Sandton, Johannesburg, South Africa

Keller company Franki Africa carried out a mammoth 550,000m³ excavation and 15,540m² lateral support basement for Discovery's new head office. Geotechnical investigations of the site revealed a very complex diabase dyke along most of one of the boundaries and a deeper weathering of the granite bedrock in the area surrounding the intrusion. This resulted in the provision of additional anchor force, and reduction in the rock excavation and blasting requirements. The biggest challenge was the doubling of the anchor forces required to provide satisfactory stability to the excavation face, and limiting the movements of the sites surrounding the excavated area.





Neuer Kanzlerplatz Bonn, Germany

Located in the heart of Bonn, the 'Neue Kanzlerplatz' is an attractive urban quarter consisting of modern office buildings and a hotel. The project comprised three pentagonal buildings including a 100m-tall high-rise structure and a three-storey underground car park.

Keller Grundbau constructed the complete excavation pit covering an area of 20,000m², with a depth of up to 12m. Our services included 6,000m² of diaphragm walls; 2,000m² of secant bored pile walls; 7,000m of anchors; steel reinforcements and 130,000m³ of excavated material.







Shopping centre, Tamaraceite Canary Islands, Spain

Keller Cimentaciones was awarded excavation and retaining structure design and construction work for a large shopping centre. The cohesionless soil and close proximity of a road, meant that a 180m-long pile wall braced with ground anchors was required.





Hafenparkquartier Frankfurt, Germany

The 'Hafenparkquartier' project is under development in Frankfurt within close vicinity of the river Main, besides the European Central Bank.

Keller Grundbau was awarded the contract to construct the 10m-deep excavation pit on an area of 15,000m² – including related earthworks and dewatering system. The scope of works comprises the construction of an 18m-deep secant bored pile wall with two rows of retaining anchors. In part of the area, permanent micropiles are installed to prevent flotation. Foundation piles with a diameter of 1.5m will be constructed beneath the high-rise buildings.







Muharraq Sewage Treatment Plant (STP), Bahrain

The Muharraq STP involved the construction of gravity sewer and network connections comprising 47 shafts, one intermediate lifting station (ILS) and one terminal lifting station (TLS). Keller's scope includedeight shafts and one ILS varying in diameter and depths. Keller constructed 0.9m diameter secant piles to a maximum depth of 22.5m to allow the deep shaft excavation works to proceed in dry conditions. Double walled steel casings were used to case the entire length of the secant piles ensuring the required verticality that subsequently produced adequate secant between adjacent piles that is essential to prevent water seepage.

Project examples






The construction of the double-floor machine chamber 10m below the courtyard of the 18th-century palace was highly restricted by the presence of historic structures in the subsoil, giving the excavation pit a complex layout. The design and build of the excavation support system was done by Keller Polska and was successful in protecting adjacent buildings. Lateral displacement of the palace wall not exceeding 4mm.

The palace is built on ground with two-eight metrethick uncontrolled deposits underlain by fine sands and Pliocene clay, with a groundwater level to depths of twosix metres.

A temporary retaining wall was built using a row of deep soil mixing columns, each 0.7m in diameter and 14.5m long, spaced at 0.55m. A steel beam was installed in every second column to provide the required wall strength. The wall was anchored with two - three rows of pre-stressed anchors each 18m long.

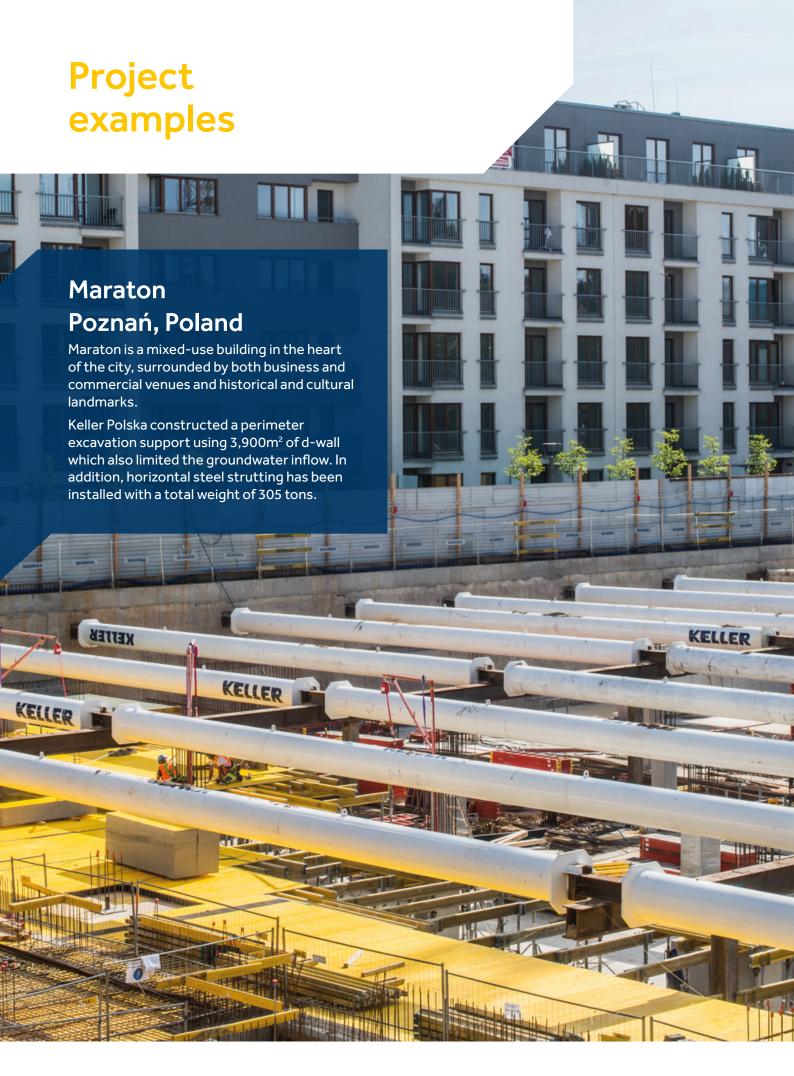




Trémie du Port Autonome de Strasbourg, France

The extension of the Strasbourg tramway line D needed to pass under an existing railway line, so an underground passage was constructed below the groundwater table.

Keller Fondations Spéciales installed 620mm-diameter secant piles and a 1,200m2 injected slab (1,000mm thick, cement grout and silica mix) as temporary cut-off during civil works.




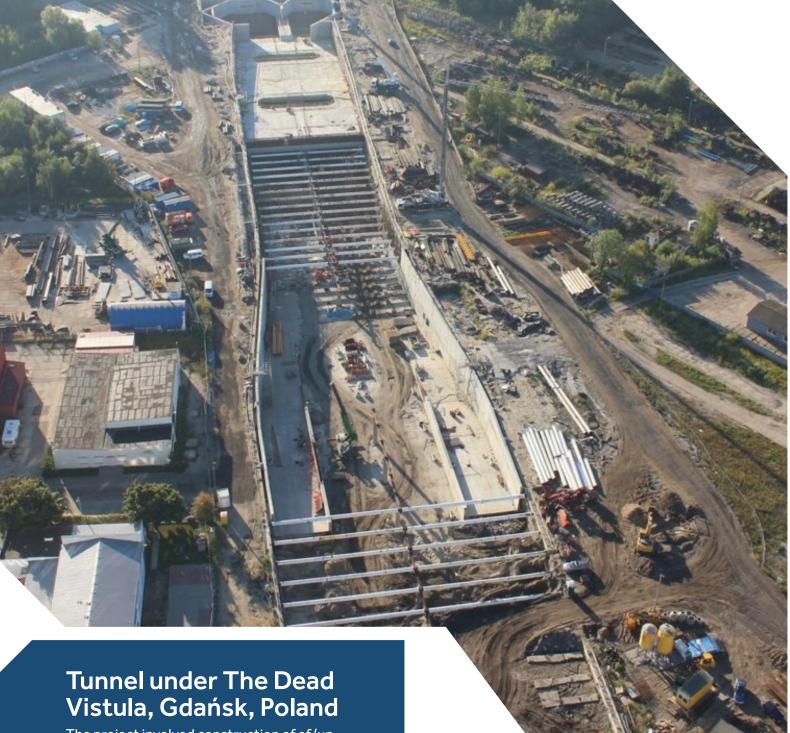


The project involved construction of of (up to) 22m-deep and 1,090m-long excavation pits for tunnel ramps and two Tunnel Boring Machines chambers. The team worked with high groundwater levels and challenging ground conditions at the Vistula River estuary, characterised by an alternating presence of sands and soft organic silt. The client adopted Keller's design proposal to move from working underwater to a dry operation to cut construction time and reduce costs. Anchored soilcrete plugs were used in TBM chambers to ensure structural stability and water-tightness - a unique approach.

The scope of work included 66,400m² d-walls, 42,000m³ jet grouting, 60,000m micropiles, 1,500m³ reinforced concrete, and the installation of 3,000 tons steel structures.



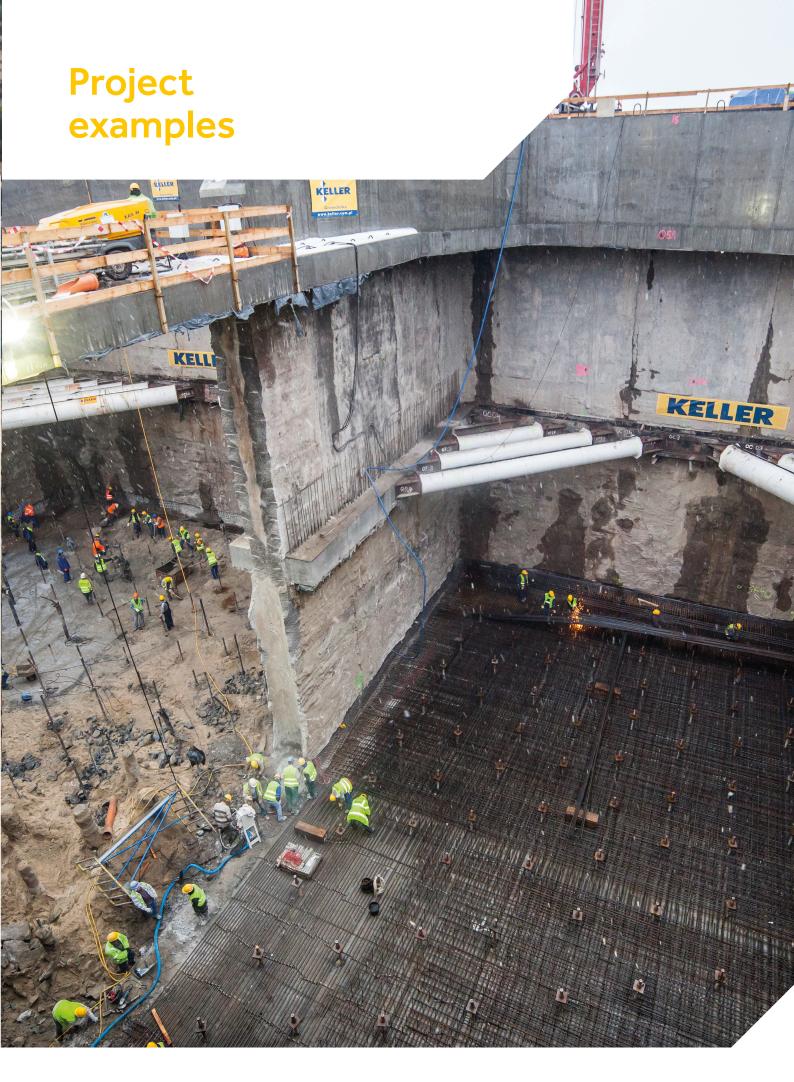



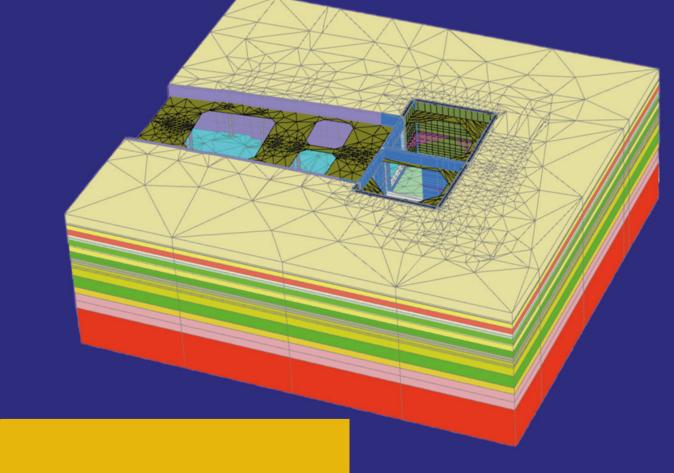

Keller Group Plc

Geotechnical specialist contractor www.keller.com

